



APPLICATION GENERAL OFFICE ENVIRONMENT
TITANFLOR® - 'BARE FINISH RAISED FLOOR' SYSTEM

We are not producing products, we are producing values for you


OFFICE PANEL SERIES

Specification Details

Panel Type TITANFLOR® Bare Finish Raised Floor
 Understructure TITANFLOR® FS-B-PST Understructure

Description of 'Bare Finish Raised Floor' System

The 'Bare Finish Raised Floor' system forms a rigid membrane by safely locking the panels in position, from above - by corner fixing screws. This locking system creates a stringerless raised floor that is capable of withstanding normal static and dynamic loads experienced in the majority of general office environments.

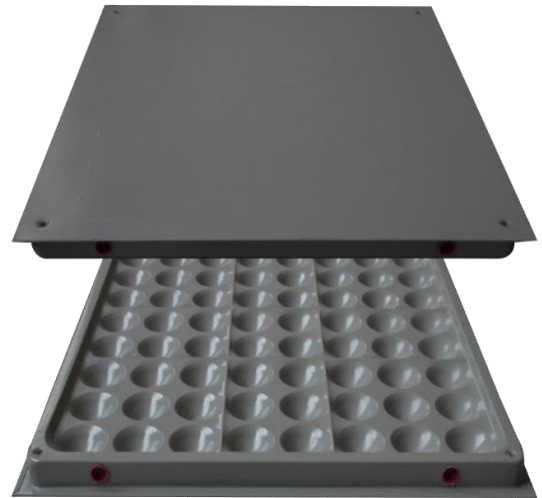

Performance Summary



Application	A general office environment where people, workstations and normal office equipment will occupy the space. The space is likely to be subject to equipment loads, normal levels of foot traffic and infrequent rolling loads in the office corridors and aisleways.
Performance	The access floor will be with a safety factor of three times the concentrated (design) load, and is capable of meeting static and dynamic loads per CISCA Platform (Raised Access) Floors Performance Specification.
Finished Floor Height	The finished floor height of the access floor, measured from the sub-floor to the top surface of the installed access floor, shall be as shown in the contract drawings.
Installation	The access floor will be rigid, free from vibration and rocking panels within a $\pm 3.0\text{mm}$ level over the entire space.
Surface Finish	The access floor shall have a 'bare' panel surface finish.
Fire Rating	All panels are to provide zero fire hazard indices under CISCA Platform (Raised Access) Floors Performance Specification – Fire and Safety Requirements.
Maintenance	All whole panels will be interchangeable allowing for any future changes. The access floor will maintain these original conditions when runs of panels have been removed for normal underfloor access.

Performance to Standards Guide per CISCA Platform

(Raised Access) Floors Performance Specification

Structural Performance: Provide access flooring system capable of supporting the following loads and stresses within limits and under conditions indicated, as demonstrated by testing manufacturer's current standard products according to referenced procedures in latest revised edition of Ceilings and Interior Systems Construction Associates (CISCA) "Recommended Test Procedures for Access Floors" referenced elsewhere in this section as CISCA/AF or, if not specified, manufacturers standard method

1. Concentrated Loads: To determine the maximum deflection(s) and permanent set(s) of an access floor under load.
2. Ultimate Load: To verify the ability of an access floor to accept the manufacturers' published ultimate load.
3. Rolling Loads: To determine the durability and/or deformation of access floor systems when exposed to commercially anticipated caster traffic using a specified load.
4. Uniform Loads: To determine the maximum deflection(s) and permanent set(s) of an access floor under a uniformly distributed load.
5. Drop Impact Loads: The purpose of this test is to show the effect upon access floor panels and supporting understructure system(s) when subject to impact from heavy loads being accidentally dropped onto the floor panel.
6. Pedestal Axial Loads: To verify the axial load an access floor pedestal assembly can withstand without structure failure or damage to components inclusive of threads, nuts, collars, etc.
7. Pedestal Overturning Moment Loads: To determine the overturning moment an access floor pedestal assembly and its application to the sub-floor can resist.

Type	Size	Rolling load		Uniform load		Ultimate load		Concentrated load			
		10PASS	10KPAAAS S					0.100"/2.5mm DEFLECTION		0.080"/2.0mm DEFLECTION	
FS662	600*600* 33mm	2.45KN	2.00KN	3300 LB/m ²	14.71 KN/m ²	2000LB	8.85KN	662LB	2.94KN	600LB	2.67KN
FS800	600*600* 33mm	2.94KN	2.45KN	4000 LB/m ²	17.78 KN/m ²	2530LB	11.25KN	800LB	3.56KN	750LB	3.34KN
FS1000	600*600* 33mm	3.56KN	2.67KN	5000L B/m ²	22.22 KN/m ²	3260LB	14.50KN	1000LB	4.45KN	800LB	3.56KN
FS1250	600*600* 33mm	4.45KN	3.56KN	6250 LB/m ²	27.78 KN/m ²	4130LB	18.36KN	1250LB	5.56KN	1000LB	4.45KN
FS1500	600*600* 33mm	5.56KN	4.45KN	7500 LB/m ²	33.34 KN/m ²	5000LB	22.17KN	1500LB	6.68KN	1250LB	5.56KN